


## Excavator mounted Bottom Feed Vibrolance for 8 m treatment

### Technical specifications BFS18-E8

Stone column diameter	450-800	mm
Treatment depth	8	m
Hydraulic power	110 / 150	kW / HP
Eccentric moment	1,8	kg.m
Operational frequency	50 / 3000	Hz / rpm
Maximum centrifugal force	181	kN
Maximum oil flow	189	L/min
Maximum working pressure	350	bar
Maximum pull up	150	kN
Maximum pull down	150	kN
Stone Tank	1	m <sup>3</sup>
Total weight without gravel	4 220	kg
Maximum weight with gravel	6 587	kg
Recommended gravel	10-40	mm
Optional: 2m extension	605	kg

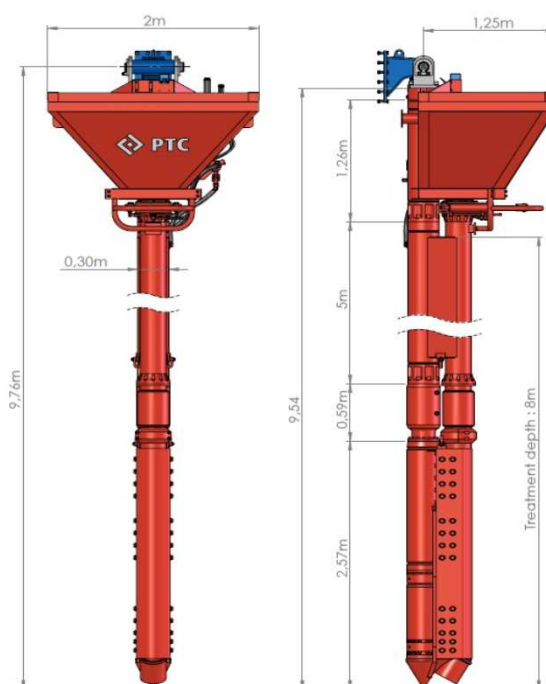

Easy maintenance thanks to patented design of "Hardox shields"

For reference, gravel density: 1,6

#### PTC

56 rue de Neuilly  
93136 Noisy-le-Sec Cedex  
France

Tel. : +33 (0)1 49 42 72 95  
Fax : +33 (0)1 48 44 00 02

[www.ptc.fayat.com](http://www.ptc.fayat.com)

[contact@ptc.fayat.com](mailto:contact@ptc.fayat.com)