

VL18 for Excavator



Technical specifications


| | | |
|-----------------------|-----------|----------|
| Hydraulic power | 110 / 150 | kW / HP |
| Eccentric moment | 1,8 | kg.m |
| Operational frequency | 50 / 3000 | Hz / rpm |
| Centrifugal force | 181 | kN |
| Oil flow | 189 | L/min |
| Maximum pressure | 350 | bar |
| Total weight | 2450 | kg |

| | | |
|-----------------------|---------|----|
| Stone column diameter | 450-800 | mm |
| Treatment depth | 8 | m |

Easy maintenance thanks to patented design
"Hardox shields"

Option : air or water jetting

| | | |
|-----------------------|------|----|
| Option : 5m extension | 1100 | kg |
|-----------------------|------|----|

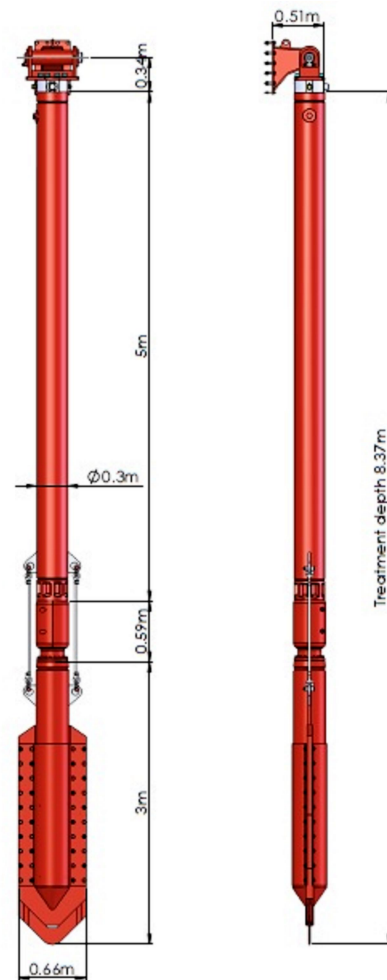

PTC

56 rue de Neuilly
93136 Noisy-le-Sec Cedex
France

Tél. : +33 (0)1 49 42 72 95
Fax : +33 (0)1 48 44 00 02

Email : contact@ptc.fayat.com
Site web : www.ptc.fayat.com



Certified Quality
Management System
n° 353865

PTC reserves the right to modify the specifications without notice.

FT-VL18 for Excavator-034750-2015-05-18-en