








## Chisel

**Technical data** 



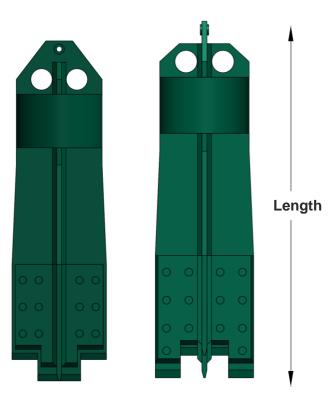

**Chisel Diameter** 

Nominal Diameter	Chisel Diameter	Length	Weight
mm	mm	mm	kg
500	400	3000	1300
600	500	3000	1400
700	600	3000	1500
800	680	3000	1800
900	780	3000	2200
1000	850	3000	2500
1200	1050	3500	3000
1300	1150	3500	3200
1500	1300	3500	3500
1800	1600	3500	4500
2000	1800	3500	5000

Custom lengths and diameters are available upon request

## Features


- Betek TungStuds wear protection along the chisel body
- Blades in Hardox HB500
- Upper ring which reinforces the entire structure and guides the chisel without damaging the casing during the excavation
- A swivel eye, fitted to the chisel body which assures long rope life

## Application

The chisel is usually used in combination with grabs to pound and fracture stratification with hardness > of 100 MPa



Specifications shown are only indicative and subject to alterations without prior notice



IDE International Drilling Equipment, Inc. 645 Angus Street Rural Hall, NC 27045 p 877-207-6062 f 866-710-3842 IDEDRILL.com